

Control Foam Residue Left in Carpets from Previous Cleanings



Ready-To- Use pH 6-7

Pint 12/cs.

Gallon 4/cs.

55 Gallon Drum

C276-007

C276-005


C276-001

Use Formula **DF Defoamer** when extraction cleaning carpets that have been shampooed, foam cleaned or bonnet-maintained excessively. **DF Defoamer** is easily dispersed in hot or cold water. **DF Defoamer** can be sprayed on the carpet before cleaning. Certified Defoamer will help protect extraction vacuum motors by reducing excessive foam to liquid more quickly.

DIRECTIONS FOR USE

Shake well before using. Test fabric in inconspicuous place for color fastness before using.

1. Dilute 1 part Defoamer to 7 parts water (4 oz. Defoamer plus water to 1 quart) should be prepared, carried and used by your cleaning crew.
2. In the Vacuum Tank: Defoamer is best used in the vacuum tank. Start with 1 ounce of diluted Defoamer for a 5 gallon tank. More may be added as needed. Properly used Defoamer adds dimensions to your vacuum tank to permit full use of the extraction process.
3. In the Cleaning Solution: When the carpet has heavy shampoo residue, diluted Defoamer may also be added to the cleaning solution. Try 1 ounce per 5 gallon of solution. Note: Defoamer in the solution tank might cause clogging of some equipment filters.
4. As a Spray: When the carpet has a heavy shampoo residue, diluted Defoamer may also be sprayed on the carpet before cleaning. Mix 1 ounce of diluted Defoamer and dilute that further with water to 1 quart. Spray this very sparingly to cover at least 200 square feet.

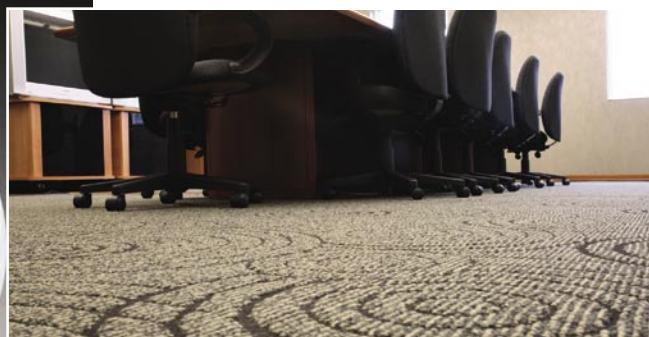

Nilodor, Inc.

10966 Industrial Parkway, N.W. P.O. Box 660

Bolivar, OH 44612-0660 U.S.A.

1-800-443-4321 or (330) 874-1017

FAX (330) 874-3366

www.nilodor.com